




MATERION

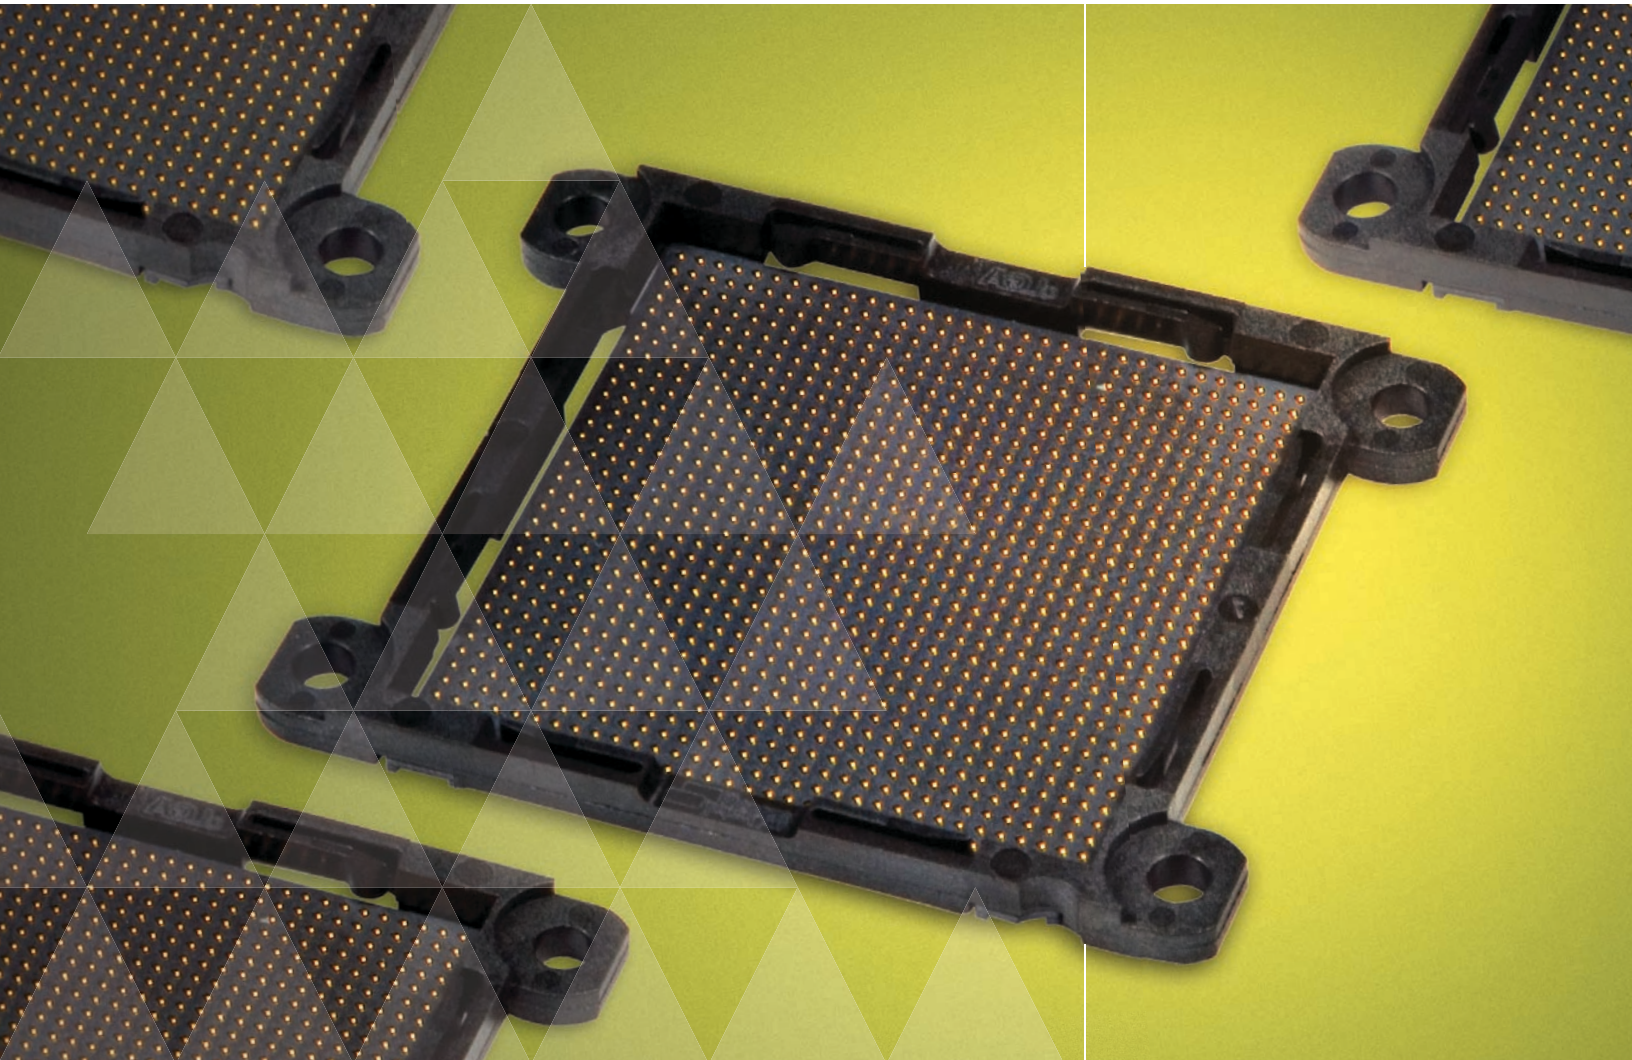


BRUSH PERFORMANCE ALLOYS


ENGINEERED TO PROVIDE
HIGH STRENGTH, AND HIGH
CONDUCTIVITY

ALLOY 390

ALLOYS THAT DELIVER SOLUTIONS

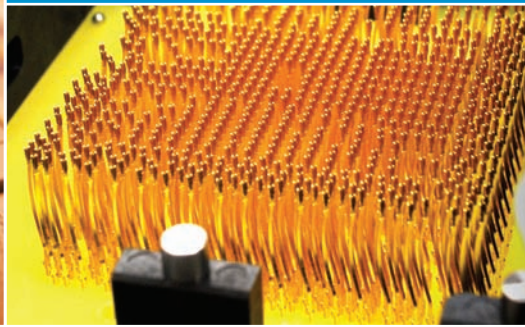

Utilizing Lean Six Sigma methodology, Materion Brush Performance Alloys has made process breakthroughs that make it possible to produce an alloy that has both **high strength and high conductivity**. Our Alloy 390® combines the best attributes of two separate families of commercial copper beryllium alloys – the strength of the “high strength” alloy C17200 with the conductivity of “high conductivity” alloys C17410 and C17510. In addition to the combination of high strength and conductivity, Alloy 390® has excellent stress relaxation resistance at elevated temperatures. In applications where durability is important (burn-in and test sockets, board to board connectors, power connectors, relays, etc.), the excellent fatigue strength of Alloy 390® extends the product life, providing better utility, that translates into cost savings.

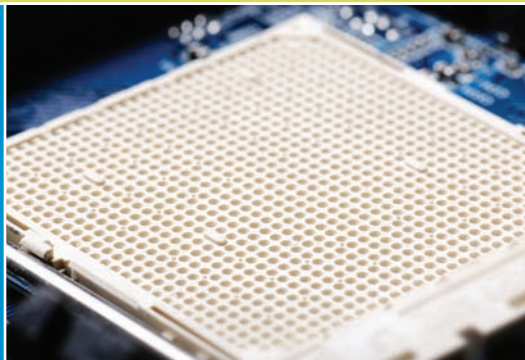

KEY PRODUCT ATTRIBUTES

High Conductivity – Maintains flow of electrical and thermal energy, reducing device operating temperatures and improving device battery life.



Excellent Stress Relaxation Performance – Retains contact force at elevated temperatures for high reliability.

Excellent Resilience – Tolerates large displacements without permanently deforming.

Excellent Fatigue Strength – Enables high cycle life without degradation of contact force.

Potential uses of copper-nickel-beryllium Alloy 390® include computer burn-in and test sockets (BiTS), production sockets, power connectors, switch, relay, automotive power applications, as well as other hand held and portable electronic contact applications.

Alloy 390® was specifically designed for high power applications, providing a unique combination of high strength and high conductivity. Increasing power requirements are driving the need for lower conductor resistance to reduce joule heating. Higher thermal conductivity is critical to thermal management. Higher power requirements are creating harsh environments and higher operating temperatures. Alloy 390® provides excellent stress relaxation resistance at elevated temperatures which increases electrical contact reliability.

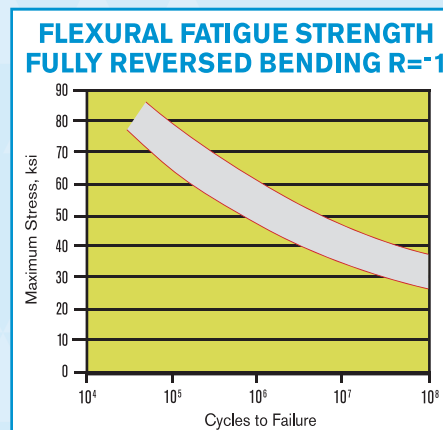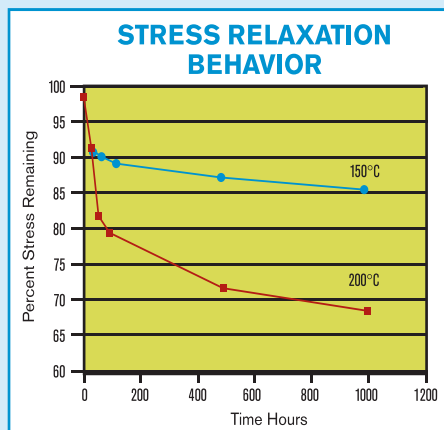

CHEMICAL COMPOSITION

UNS C17460	Weight Percent
Beryllium (Be)	0.15-0.50
Nickel (Ni)	1.0-1.4
Copper (Cu)	Balance

Health & Safety – Handling copper beryllium in solid form poses no special health risk. Like many industrial materials, beryllium-containing materials may pose a health risk if recommended safe handling practices are not followed. Inhalation of airborne beryllium may cause a serious lung disorder in susceptible individuals. The Occupational Safety and Health Administration (OSHA) has set mandatory limits on occupational respiratory exposures. Read and follow the guidance in the Material Safety Data Sheet (MSDS) before working with this material. For additional information on safe handling practices or technical data on copper beryllium, contact **Materion Brush Performance Alloys, Technical Service Department at 800.375.4205.**

MECHANICAL AND PHYSICAL PROPERTIES

Yield Strength	Tensile Strength	Elongation	Formability 90° (R/t)	Electrical Conductivity	Elastic Modulus	Density	Hardness
130-153 ksi	138-158 ksi	1% min.	*2.0 Long.	44% IACS min.	20 x 10 ⁶ psi	0.318 lb/in ³	280-340 HV
930-1055 N/mm ²	950-1090 N/mm ²		*2.0 Trans.		138 kN/mm ²	8.80 g/cm ³	
95-108 kg/mm ²	97-111 kg/mm ²				14.1 kg/mm ²		

* Formability is applicable in the thickness range of 0.002" - 0.004".

For formability information outside of this range, please contact your local Brush Performance Alloys representative.



ALLOY COMPARISONS

Alloy	Temper	Yield Strength		Electrical Conductivity %IACS	Elongation %min	Formability 90° Bend (R/t)		Elastic Modulus	Hardness
		ksi	N/mm ²			Long.	Trans.		
Alloy 390®	HT	130-153	931-1055	44	1	*2.0	*2.0	20	280-340
Alloy 190	XHM	135-170	931-1172	17	4	4.0	5.0	19	317-378
Brush 60®	HT	105-125	720-860	50	10	1.5	1.5	20	230-290
7025	TM03	95-120	655-825	40	5	2.5	2	19	200-250
7026	S	95	655	40	6	0.5	1	19	200
725	XS	95	655	11	1 max	2	3	20	190-240
YCuT-F	EH	148	1020	10	1	-	7	18	310-360
K55	R690	95-120	655-825	40	5	2	2	19	220-260
688	H	101	696	18	4	2	2	17	255
654	XH	109	751	7	4	2	3.5	17	213-235

Alloy 390® is available in strip form ranging from 0.0015" to 0.010" thick.

For additional product specification information, please contact your local Brush Performance Alloys representative.



MATERION

ABOUT MATERION

Materion is the new name for Brush Engineered Materials Inc., its Brush Wellman Inc. subsidiary, and all of the company's businesses worldwide. Materion is among the world's premier providers of advanced materials solutions and services. Now under the one Materion brand, we are better aligned to deliver a broader scope of products, services and expertise needed to drive our customers' growth and profitability and become their first choice in a partner. Materion Corporation common stock trades on the New York Stock Exchange under the symbol MTRN.

MATERION BUSINESSES

Advanced Chemicals	Electrofusion
Barr Precision Optics & Thin Film Coatings	Large Area Coatings
Brush Beryllium & Composites	Microelectronics & Services
Brush Performance Alloys	Natural Resources
Ceramics	Technical Materials

BRUSH PERFORMANCE ALLOYS INTERNATIONAL LOCATIONS

CHINA/HONG KONG
p + 852.2318.1907
brushalloysHK-info@materion.com

CHINA/SHANGHAI
p + 86.21.5237.2328
brushalloysCN-info@materion.com

GERMANY
p + 49.711.830.930
brushalloysDE-info@materion.com

INDIA/PUNE
p + 91.99606.33744
brushalloysIN-info@materion.com

JAPAN
p + 81.33.230.2961
brushalloysJP-info@materion.com

REPUBLIC OF KOREA
p + 82.32.811.2171
brushalloysKR-info@materion.com

SINGAPORE/ASEAN
p + 65.6842.4456
brushalloysSG-info@materion.com

TAIWAN, R.O.C.
p + 886.2.2747.8800 ext. 121
brushalloysTW-info@materion.com

UNITED KINGDOM & IRELAND
p + 44.118.930.3733
brushalloysUK-info@materion.com

BRUSH PERFORMANCE ALLOYS

Main Office
6070 Parkland Boulevard
Mayfield Heights, OH 44124 USA
p 800.375.4205 +1.216.486.4200
www.materion.com/brushalloys