

## Alloy 3 (C17510) Strip

Materion Brush Performance Alloys' Alloy 3 mill hardened strip provides good strength with high electrical conductivity and good resistance to stress relaxation. It is a drop-in replacement for the obsolete Alloy 10 (C17500) strip material in Automotive, Appliance and DataCom/Telecom market applications. Typical applications include high reliability spring contacts for switches and relays.

### CHEMICAL COMPOSITION (weight percent)

Alloy	Beryllium	Nickel	Copper
C17510	0.20-0.60	1.4-2.2	Balance

### PHYSICAL PROPERTIES\*

Elastic Modulus	Melting Point (Solidus)	Electrical Conductivity/resistivity	Density	Thermal Expansion Coefficient	Thermal Conductivity (25 °C)
20,000 ksi 138 GPa	1900°F 1040 °C	45-60% IACS 2.9-3.8 μΩ-cm	0.319 lb/in <sup>3</sup> 8.83 g/cm <sup>3</sup>	9.8x10 <sup>-6</sup> in/in °F 17.6x10 <sup>-6</sup> m/m °C	140 BTU/ft hr °F 240 W/ m K

\*Properties specified for the precipitation age hardened (heat treated) condition

### MECHANICAL PROPERTIES\*\*

Temper**	0.2% Offset Yield Strength		Ultimate Tensile Strength		Elongation***	Hardness	Formability (Minimum Bend Radius to Thickness Ratio for a 90° Bend)****	
	ksi	MPa	ksi	MPa			Longitudinal	Transverse
AT (TF00)	80-100	550-690	100-130	680-900	10-25	195-275	1.0	1.0
HT (TH04)	95-120	650-830	110-135	750-940	8-20	216-287	2.0	2.0

\*\*Properties may vary by thickness. \*\*\* Percent elongation valid for Strip 0.004" (0.10 mm) and thicker.

\*\*\*\*Formability numbers valid for strip 0.010" (0.25 mm) and thinner.

### FORMS AVAILABLE


Alloy 3 strip is available in widths ranging from 0.050" to 16" (1.27 mm to 452.7 mm) and in thicknesses ranging from 0.002" to 0.125" (0.05 mm to 3.18 mm). It is also available in rod, wire, bar, tube and plate.

### SPECIFICATIONS

C17410, ASTM B-768 ASTM B534, EN 1652, EN 1654, EN 13148, EN 14436, MIL-C-81021, ISO 1187, ISO 1634

### RELATED INFORMATION

Additional information on Alloy 3 may be obtained by phoning 800-375-4205.

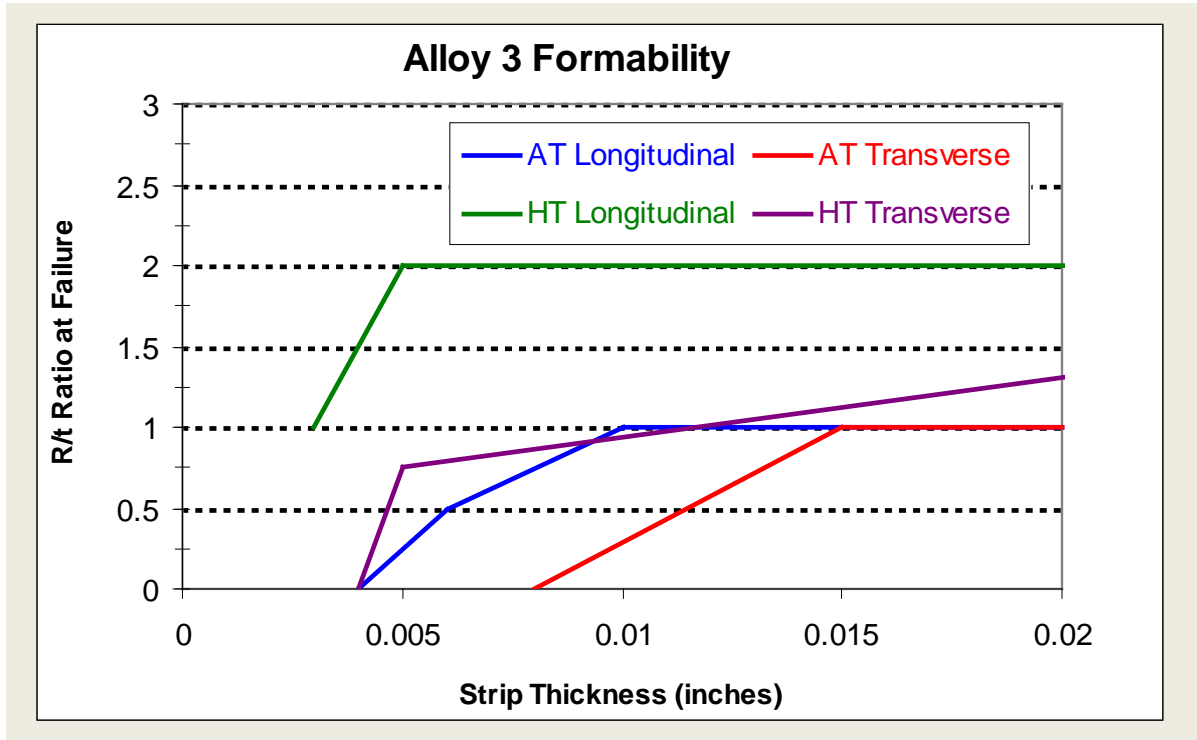

#### North American Service Centers – Sales Inquiries

For strip, wire and rod under 0.4" (10 mm) diameter  
**Elmhurst, IL**  
 TOLL FREE: 800.323.2438  
 LOCAL: +(1) 630.832.9650  
 FAX: +(1) 630.832.9657

For plate, tube, bar, and rod 0.4" (10 mm) diameter and over  
**Warren, MI**  
 TOLL FREE: 800.521.8800  
 LOCAL: +(1) 586.772.2700  
 FAX: +(1) 586.772.2472

#### International Sales Offices

**CHINA/HONG KONG**  
 TEL: +852.2318.1960/1907  
[brushalloysHK-info@materion.com](mailto:brushalloysHK-info@materion.com)

**INDIA/PUNE**  
 TEL: +(91) 99606.33744  
[brushalloysIN-info@materion.com](mailto:brushalloysIN-info@materion.com)

**SINGAPORE/ASEAN**  
 TEL: +(65) 6842.4456  
[brushalloysSG-info@materion.com](mailto:brushalloysSG-info@materion.com)

**CHINA/SHANGHAI**  
 TEL: +(86) 21.5237.2328  
[brushalloysCN-info@materion.com](mailto:brushalloysCN-info@materion.com)

**JAPAN**  
 TEL: +(81) 33.230.2961  
[brushalloysJP-info@materion.com](mailto:brushalloysJP-info@materion.com)

**TAIWAN, R.O.C.**  
 TEL: +(886) 2.2747.8800x121  
[brushalloysTW-info@materion.com](mailto:brushalloysTW-info@materion.com)

**GERMANY**  
 TEL: +(49) 711.830.930  
[brushalloysDE-info@materion.com](mailto:brushalloysDE-info@materion.com)

**REPUBLIC OF KOREA**  
 TEL: +(82) 32.811.2171  
[brushalloysKR-info@materion.com](mailto:brushalloysKR-info@materion.com)

**UNITED KINGDOM @ IRELAND**  
 TEL: +(44) 118.930.3733  
[brushalloysUK-info@materion.com](mailto:brushalloysUK-info@materion.com)

To obtain a complete list of Materion's global distributor/agent network, visit us online at [www.materion.com/BrushAlloys/ContactUs](http://www.materion.com/BrushAlloys/ContactUs).