

BrushForm® 158 Strip: TM18 and TM19 Tempers



Materion Performance Alloys' BrushForm® 158 strip is a high-performance, heat treated spinodal copper nickel tin alloy designed to provide optimal photochemical machinability, high yield strength, and increased fatigue life. The TM18 and TM19 tempers provide excellent flatness and stiffness coupled with high resistance to vibration, fatigue and impact loading. This makes them ideal for voice coil motor springs in optical image stabilization systems.

CHEMICAL COMPOSITION (weight percent)

Alloy	Nickel	Tin	Copper
BrushForm® 158 Strip	14.5 - 15.5	7.5 - 8.5	Balance

PHYSICAL PROPERTIES

Elastic Modulus	Density	Typical Electrical Conductivity	Coefficient of Thermal Expansion	Relative Magnetic Permeability	Poisson's Ratio
119 - 145 GPa	9.00 g/cm ³	7% IACS 4 MS/m	16.4 ppm/°C	<1.01	0.3

MECHANICAL PROPERTIES

Temper	0.2% Offset Yield Strength (MPa)	Ultimate Tensile Strength (MPa)	Elongation (%)*	Hardness (HV)
TM18	1375 typ.	1400 typ.	1.5 typ.	375 min.
TM19	1375 typ.	1416 typ.	1.4 typ.	375 min.

* Percent elongation valid only for strip greater than 0.004" (0.10 mm) thick.


STANDARD AVAILABILITY

Mill Hardened Tempered Strip: 0.025 mm – 0.12mm gauge.

SPECIFICATIONS AND STANDARDS

UNS C72900, ASTM B740

FATIGUE DATA*

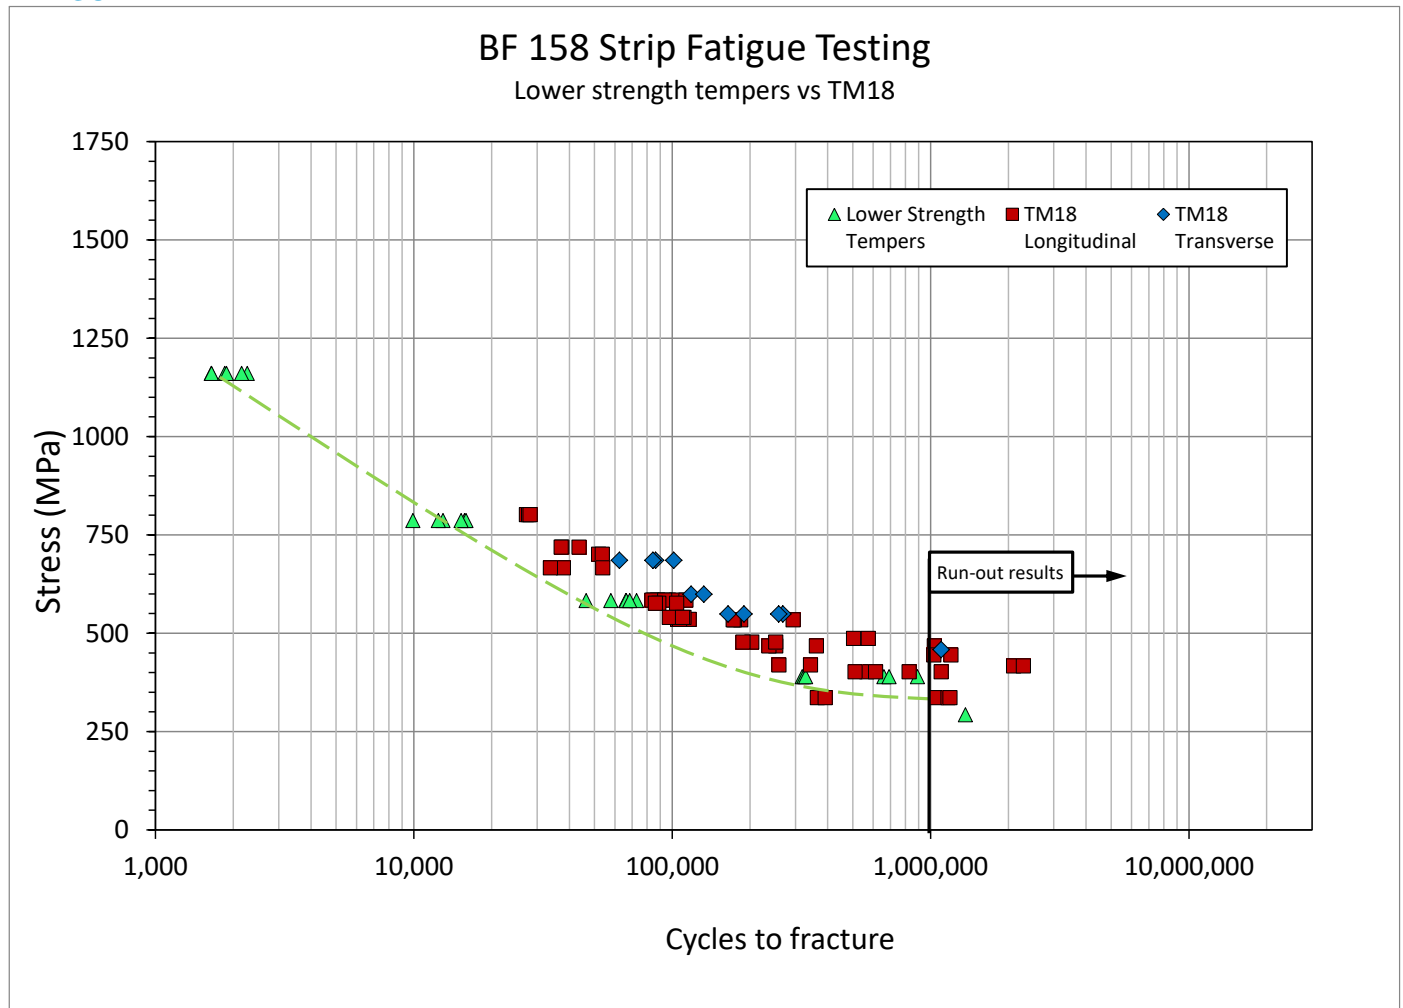

*TM19 Fatigue Testing in Process

CONTACT INFORMATION

North American Sales	Pricing, availability, tolerances, etc.	800-323-2438
Technical Service	Properties, application and design assistance, fabrication and processing assistance, etc.	800-375-4205 +(1) 216-692-3108
International Sales World-wide Distribution	Link to US and international distributors and international sales offices	US distributors International distributors

North American Service Centers – Sales Inquiries

For strip ≤ 0.060 " (1.5 mm) thick. wire and rod ≤ 0.5 " (12.7 mm) diameter:

Elmhurst, IL
TOLL FREE: 800-323-2438
PHONE: +(1) 630-832-9650
FAX: +(1) 630-832-9657

International Sales Offices

CHINA/HONG KONG

TEL: + (852) 2318-1960 / 1907
brushalloysHK-info@materion.com

JAPAN

TEL: + (81) 33 230 2961
brushalloysJP-info@materion.com

TAIWAN, R.O.C.

TEL: + (886) 2-2747-8800 x-121
brushalloysTW-info@materion.com

CHINA/SHANGHAI

TEL: + (86) 21-5237-2328
brushalloysCN-info@materion.com

REPUBLIC OF KOREA

TEL: + (82) 2 702 2961
brushalloysKR-info@materion.com

UNITED KINGDOM & IRELAND

TEL: + (44) 118-930-3733
brushalloysUK-info@materion.com

SINGAPORE/ASEAN

TEL: + (65) 6842-4456
brushalloysSG-info@materion.com

GERMANY

TEL: + (49) 711-830-930
brushalloysDE-info@materion.com

Materion Performance Alloys

6070 Parkland Boulevard
Mayfield Heights, OH 44124 USA
phone: 216.486.4200 fax: 216.383.4005
email: BrushAlloys-info@materion.com

MATERION CORPORATION

www.materion.com/alloys

AD0123_0817

BrushForm® is a Registered Trademark of Materion Brush Inc.
© 2017 Material Brush Inc.